




PERFORMANCE

Utilizing TurboChef's patented technology to rapidly cook food without compromising quality, the CIBO+ provides superior cooking performance while requiring less space and consuming less energy.

VENTILATION

- UL (KNLZ) listed for ventless operation.[†]
- EPA 202 test (8 hr):
 - Product: Pepperoni Pizzas
 - Results: 0.48 mg/m³
 - Ventless Requirement: <5.00 mg/m³
- Internal catalytic filtration to limit smoke, grease, and odor emissions.

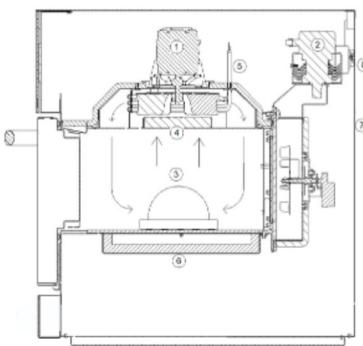

1. Blower Motor	5. Cavity Heater
2. Microwave System	6. Base Heater
3. Stirred Impinged Air	7. Oven Vent Tube
4. Catalytic Converter	8. Air Outlet

EXTERIOR CONSTRUCTION

- Stainless steel exterior
- Powder coated, corrosion resistant air filter
- Ergonomic powder coated aluminum handle
- 5" capacitive touch screen with tempered glass cover (7" for international)

INTERIOR CONSTRUCTION

- 304/430 grade stainless steel interior
- Neoceram heated glass base
- Removable rear grease cover
- Fully insulated cavity

FEATURES

- CIBO+ utilizes a unique tri-heat technology of microwave, convection air, and independently controlled base, combined to deliver unrivaled quality, speed, and consistency
- 80 item menu capacity
- Compact footprint (15.5")
- No installation required - plug in and cook
- Ventless operation powered by a UL (KNLZ) listed catalytic converter system
- Antimicrobial protection reduces the spread of viruses on touch points
- Easily customize the position of menu items or recipe settings
- Vent catalyst to further limit emissions and odors
- Includes plug and cord (6 ft. nominal)
- Warranty includes 1-year parts and labor

STANDARD INCLUDED ACCESSORIES

- Oven Cleaner Kit, PN: 105702 (Qty 1)
- Aluminum Paddle, PN: LT05 (Qty 1)
- Teflon Tray, PN: CIBO/TT (Qty 1)
- Teflon Sheet, PN: TFS05 (Qty 1)
- USB Drive (Qty 1)



This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.

[†] Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.


[†] Ventless certification is for all food items except for foods classified as "fatty raw proteins." Such foods include raw bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, raw steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

Ultimate ventless allowance is dependent upon AHJ approval, as some jurisdictions may not recognize the UL certification or application. If you have questions regarding ventless certifications or local codes, please call 1-800-908-8726.

TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

DOC-1957 / Revision D / October 2025

DIMENSIONS		
Height	25.2"	640 mm
Width	15.5"	394 mm
Depth	26.18"	665 mm
Weight	115 lb.	52 kg
Cook Chamber Dimensions		
Height	7.68"	195 mm
Width	13.39"	340 mm
Depth	13.39"	340 mm
Volume	0.8 cu.ft.	22.55 liters
Wall Clearance (Oven not intended for built-in installation)		
Top	5"	127 mm
Sides	2"	51 mm
Back	2"	51 mm

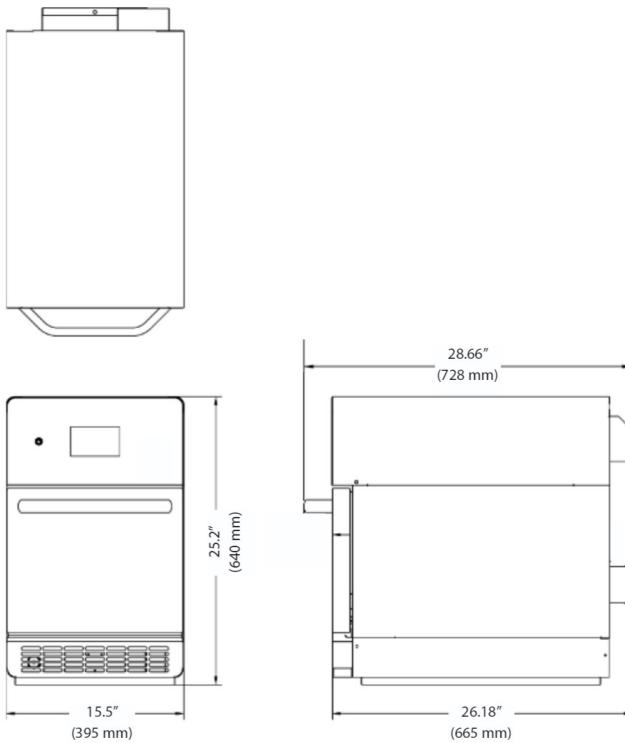

ELECTRICAL SPECIFICATIONS – SINGLE PHASE			
United States/Canada	CBO-9500-1	208-240V, 60 Hz, 20A, Max Input: 4.0kW MW: 2.0kW Heaters & Blowers: 3.6kW	NEMA 6-20
UK	CBO-9500-2-UK	230V, 50 Hz, 13A, 3 kW Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW	BS1363
EU	CBO-9500-3-EU	230V, 50 Hz, 13A, 3 Kw Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW	CEE7/V11

*Under normal operation, the oven will not exceed the max input value.

TurboChef recommends installing a type D circuit breaker for European installations.

IMPORTANT: If the oven is placed near a grill or stove, a divider must exist between the oven and the open heat source, with a minimum of 6" (153 mm) between the oven and the divider. If the oven is placed near a fryer, a divider must exist between the oven and fryer, with a minimum of 12" (305 mm) between the oven and the divider.

SHIPPING INFORMATION	
U.S.: All ovens shipped within the U.S. are packaged in a double-wall corrugated box banded to a wooden skid.	
International: All ovens shipped by air or less than container load are packaged in wooden crates. Crates are charged at an additional cost.	
International LCL: Crates are optional (recommended) at additional cost.	
Box Size: 23" x 34" x 36" (584 mm x 864 mm x 914 mm)	
Item Class: 175	
Approximate Boxed Weight: 160 lb. (73 kg)	
Minimum Entry Clearance Required for Box: 36" (914 mm)	